



Heavy duty forestry mulcher for tractors between 80 and 170 HP. Suitable for the cleaning of brushwood, which favors the growth of trees, the reclamation of land, the maintenance and restoration of banks, the maintenance of areas under power lines, forestry roads, fire blocking lines, etc. Rotor of forest conception with swinging hammers of trapezoidal shape or fixed tooth carbide. The gearbox is put off with regard to the rotor to reduce the angulation of the transmission. It incorporates rotor POLSER+ of 550 mm of diameter. Hooking: fixed and movable.

CHARACTERISTICS


- Steel-plate chassis, thickness 10 mm.
- Rotor POLSER + of 550 mm. of diameter.
- Gearbox SERRAT with RAIL BOX System.
- 4 XPC side belt transmission.
- Swinging hammers or fixed tooth carbide.
- Supports of bearing rotor in steel.
- Oscillating bearings of double row of rollers.
- Front safety chains.
- PTO 1.000 rpm.
- Steel counter hammers.
- Skid shoes adjustable.
- System antiwire in rotor.
- Internal reinforcements in chassis.
- Hydraulic rear hood.
- Compact drive cover.
- Model built under EC Normative.
- Safety indicators visible to personnel.



FIXE TOP System



Hydraulic rear hood Compact drive cover

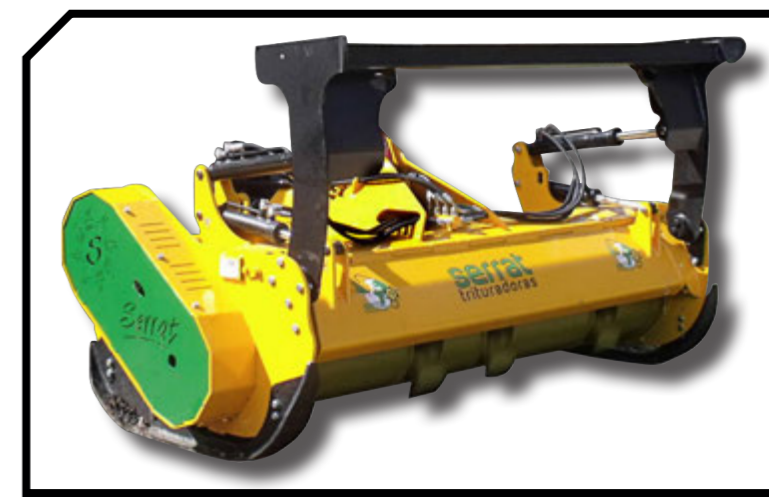

MODEL	mm	KW-HP	12	38	20	1260	4 XPC	Nº BELTS TYPE						
								A mm	A in	B mm	B in	C mm	C in	
T-1600	1600	59 - 80 125 - 170	12	38	20	1260	4 XPC	1880	74"	1340	53"	1010	40"	1000
T-1800	1800	74 - 100 125 - 170	16	42	22	1370	4 XPC	2080	82"	1340	53"	1010	40"	1000
T-2000	2000	88 - 120 125 - 170	16	48	24	1470	4 XPC	2280	90"	1340	53"	1010	40"	1000
T-2300	2300	103 - 140 125 - 170	20	56	28	1630	4 XPC	2580	102"	1340	53"	1010	40"	1000

OPTIONS

- Hydraulic starter



• Freewheel on sleeve



• Hydraulic pushing frame

