

Heavy duty forestry mulcher for tractors between 250 and 350 HP. Equipped with swinging hammers for the cleaning of brushwood, which favors the growth of trees, the reclamation of land, the maintenance and restoration of banks, the maintenance of areas under power lines, forestry roads, fire blocking lines. Equipped with rotor of fixed tooth with system FIXE TOP, for thick wood and stumps. This mulcher integrates all the necessary options for an optimal forest work.

Hydraulic rear hood  
System antiwire in rotor  
Drive shaft transmission to the belts




## CHARACTERISTICS

- Steel-plate chassis, thickness 15 mm.
- Rotor POLSER + of 1.100 mm. of diameter.
- Gearbox with RAIL BOX System with freewheel.
- Gearbox with Synkrodos-600.
- Synkrochain side belt transmission.
- Supports of bearing rotor in steel.
- Triple front safety chains.
- PTO 1.000 rpm.
- Steel counter hammers.
- Skid shoes adjustable.
- System antiwire in rotor.
- Internal reinforcements in chassis.
- Compact drive cover.
- Pulleys of diameter 450 mm.
- Oscillating bearings of double row of rollers.
- Model built under EC Normative.
- Safety indicators visible to personnel.



MODEL	mm	KW-HP	mm	mm	KG	Nº BELTS TYPE	Diagram Dimensions						
							A	A	B	B	C	C	
							mm	in	mm	in	mm	in	
T-2600	2600	223 - 300 447 - 600	128	64	5333	Synkrochain	2705	107"	2270	89"	1700	67"	1000

## OPTIONS

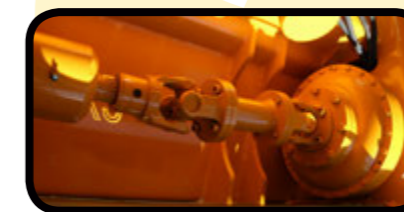

- Torque converter

SYNKRODOS

